


ONESEAL PTW 2.5 CABLE SEAL (Variable length)

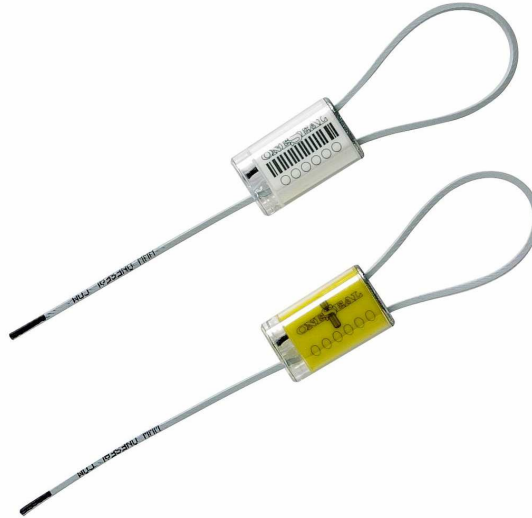

Oneseal PTW 2.5 A pull to tighten cable seal with Ø2.5 mm (3/32") wire and window protection cover

The ideal cable seal to apply on all awkward sealing points. Key applications are In-plant valves, tank-truck valves, truck trailers, rail wagons, box doors, hazardous material boxes, gates, scales, money bags, meters, barrels, airline carts etc.

The coated cable

Flexible galvanised high tensile strength aircraft control cable in steel – including steel core. A special developed plastic coating gives the Ø2.5 mm wire a square form and prevents unlocking by twisting the wire. The wire is marked in both ends for proof of tampering and easy identification. The wire is available in various lengths.

The body

The metal body features a non-flammable and shock proof PC plastic cover and a transparent plastic shield protecting the engraving against tampering. The newly developed window security indicator will assure you that the cables have been applied correctly. Standard colours are red and white. Special colours are available for large orders.

Laser engraving

Your company logo will be engraved by use of high technology laser engraving, which prevents tampering. All seals are engraved with a consecutive unique numbering. Bar coding can also be applied.

Packaging

For easy stock control and number verification the seals come in two pieces - cylinders & cables. The cylinders are packed on tape in numerical order together with the cables. For easy handling and distribution 100 seals are packed in 1 inner box. 3 inner boxes are packed in 1 outer box.

Customs

Seals are approved by Customs authorities' world wide including US Customs, HM Customs.

Type	Wire width	Cable length	Weight / pcs	Weight / 300 pcs
PTW 2.5	2.5 mm	320 mm	0.034 kg	10.38 kg

Packing: 300 pieces per carton (minimum order)

Security seals – a small important detail in shipping - provided by Oneseal an ISO 9001 certified company.